
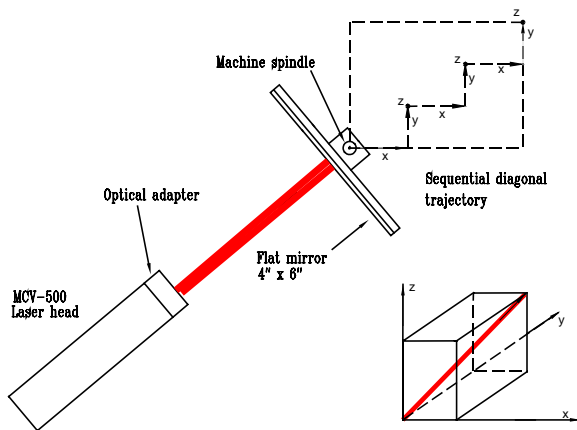


SD-500

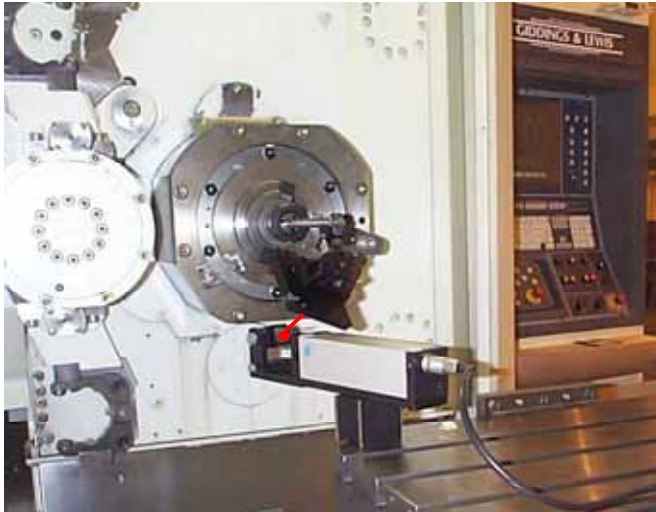

Volumetric Calibration

OPTODYNE Laser Metrology srl

Via Veneto 5 20044 Bernareggio (Milano) ITALIA
Tel. +39 039 6093618 Fax +39 039 6800147
E-mail: optodyne@attglobal.net Web: www.optodyne.com



OPTODYNE, INC.
1180 MAHALO PLACE
COMPTON, CA 90220 - USA
800/766-3920 310/635-7481
FAX 310/635-6301
E-MAIL sales@optodyne.com
WEB www.optodyne.com

OPTODYNE's SD-500 Volumetric Calibration Package, (Patent Pending) is an add-on package to OPTODYNE's MCV-500, Linear-Machine Calibration System. The combined system provides a rapid and efficient way of measuring a machine's volumetric accuracy over the working volume. The system can be used to calibrate CNC machine tools, and CMM's (Coordinate Measuring Machines). Based on the Laser Doppler Displacement Meter (LDDM™) technology, and the "Vector" measurement technique, the volumetric errors including three displacement errors, six straightness errors, and three squareness errors can be measured in hours instead of in days required using conventional techniques.

The performance of a machine tool is determined by the volumetric accuracy. With many of the CNC controls available today, the measured volumetric errors can be used to improve the machine accuracy by volumetric compensation (straightness compensation, cross compensation or sag compensation etc). The Windows™ software, running on any notebook PC, is user friendly and designed to collect and analyze data.


MAJOR FEATURES AND BENEFITS

- Easy to setup and operate.
- Measure volumetric errors including linear, straightness, and squareness.
- Quick and efficient measurement.
- High accuracy and repeatability.
- N.I.S.T. traceable laser accuracy.
- Windows™ software and Notebook PC.
- Automatic environmental compensation.
- Compact and portable.


MAJOR APPLICATIONS

- Calibration of CNC machine tools and CMM's.
- Squareness of machine axes.
- Quality Control Maintenance.
- Quick check of volumetric accuracy.
- Identify error sources

The unique property of the **MCV-500 Laser Calibration System** is the single aperture optical arrangement. With the “Vector” measurement method the laser beam direction is not parallel to the direction of movement, hence all linear error components can be measured. The lateral displacement tolerance of a conventional interferometer is too small to perform the “Vector” measurement. But with Optodyne’s MCV-500 and a flat-mirror as the target, large lateral displacements of the “Vector” measurement are possible.

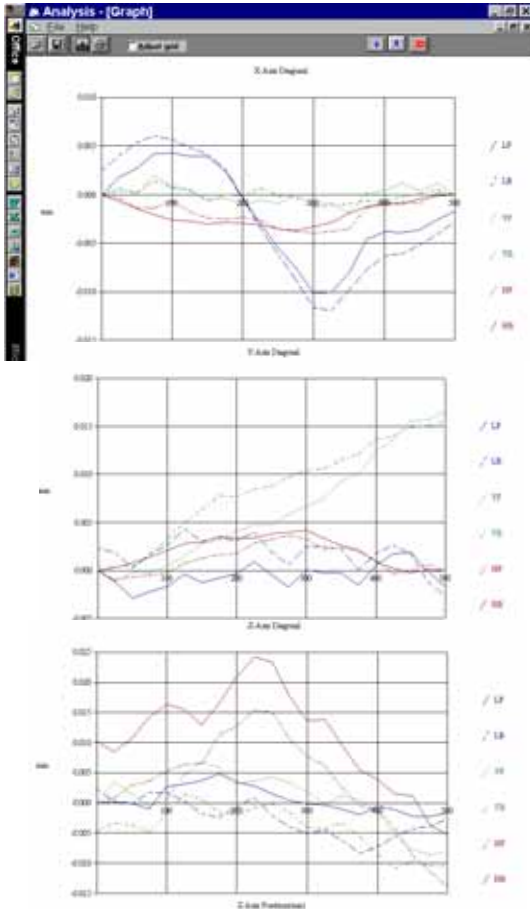

Measured Volumetric Errors

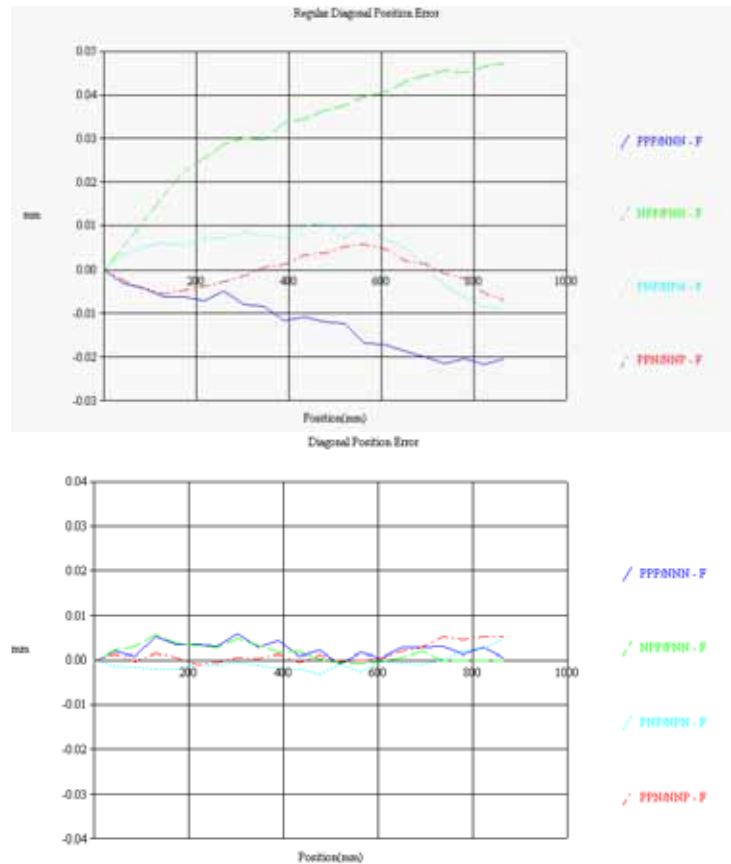

4 Diagonal without and with Volumetric Compensation

SD-500

Configuration

Laser Calibration System (not included)
 Flat Mirror Target 3" x 4" (150 x 200mm)
 Optical Adapter
 Magnetic Base & Post
 Windows™ Software
 Steering Mirror

MCV-500
 LD-71S
 LD-69
 LD-03P
 W-500SD
 LD-37S

Capability (Volumetric Calibration)

Laser Stability 0.1 PPM
 Linear Accuracy 1 PPM
 Resolution 0.01µm (1 microinch)
 Measuring Range 1 cubic meter
 (40"x40"x40")*

*NOTE: Larger measuring ranges available